

Commercial Stainless Steel Cabinets Specification Sheet

SMS-01-V69-SS


Specification Sheet

Short Form Specifications

All stainless steel type 304 enclosed cabinet. 22"-deep. 35" height. Widths range from 18" to 48" Available with open front, with single left- or right-swing door, or with double doors. 4" toe kick, leveling feet, removable back panel, and adjustable shelf. Doors, when provided, are inset double-panel construction, mounted with five-knuckle hinges and provided with 4" wire pull handle and roller catch. Designed and tested to the SEFA 8 Metal Casework recommended practices.

MODELS:


- | | |
|---|---|
| <input type="checkbox"/> SSC-HOB-18 | <input type="checkbox"/> SSC-HCBL-18 |
| <input type="checkbox"/> SSC-HOB-24 | <input type="checkbox"/> SSC-HCBL-24 |
| <input type="checkbox"/> SSC-HOB-30 | <input type="checkbox"/> SSC-HCBL-24 |
| <input type="checkbox"/> SSC-HOB-36 | <input type="checkbox"/> SSC-HCB-24 |
| <input type="checkbox"/> SSC-HOB-48 | <input type="checkbox"/> SSC-HCB-30 |
| <input type="checkbox"/> SSC-HCBL-18 | <input type="checkbox"/> SSC-HCB-36 |
| | <input type="checkbox"/> SSC-HCB-48 |

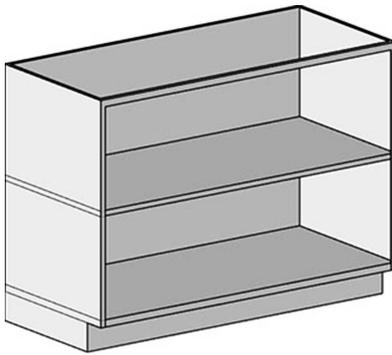


#SSC-HOB-48 cabinet
with open front

Design and Construction Features

- Type 304 stainless steel construction.
- One intermediate shelf, adjustable on $\frac{1}{2}$ " increments.
- All units are 22" (559mm) front-to-back and 35" (889mm) height.
- Available with open front or with full-height hinged doors.
- Units with doors offered with single left- or right-swing door, or with double doors.
- Doors are double-panel inset construction with five-knuckle hinges, 4" wire pull, and roller catch.
- Provided with leveling feet accessible from inside the cabinet.



#SSC-HCBL-24 cabinet with
right-swing door






#SSC-HCB-30 cabinet with
double doors

Options / Accessories

- Glass doors
- Door locks
- Additional shelves
- Custom door pulls
- Custom sizes



Standing Height Base Cabinets with Open Base or Full Height Door(s)

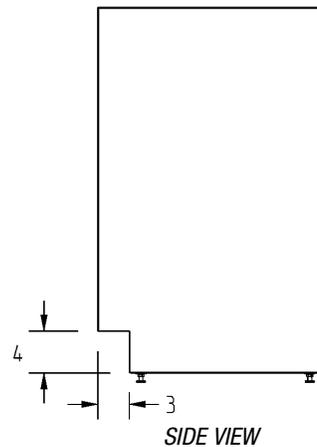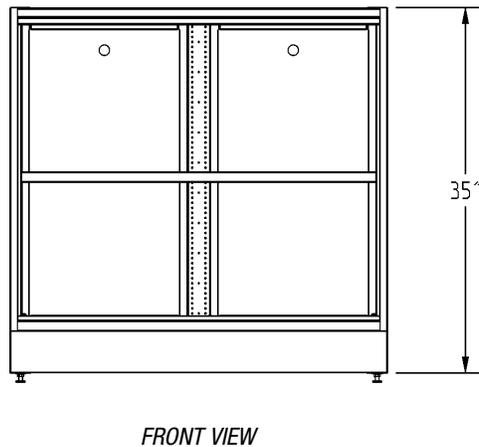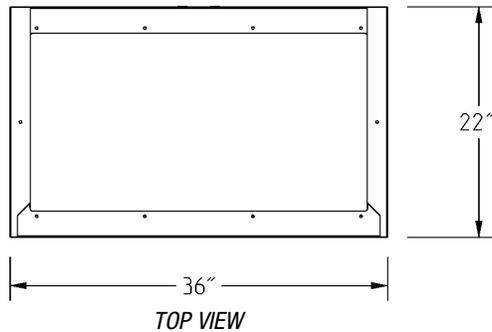

(model #SSC-HOB-36 shown)

with Open Base

depth		width		weight		model #
in	mm	in	mm	lbs.	kg	
22"	559	18"	457	74	33.6	SSC-HOB-18
22"	559	24"	610	99	44.9	SSC-HOB-24
22"	559	30"	762	124	56.2	SSC-HOB-30
22"	559	36"	914	133	60.3	SSC-HOB-36
22"	559	48"	1218	149	67.6	SSC-HOB-48

with Full-Height Door(s)


depth		width		weight		description of door(s)	model #
in	mm	in	mm	lbs.	kg		
22"	559	18"	457	99	44.9	left-swing door	SSC-HCBL-18
22"	559	18"	457	99	44.9	right-swing door	SSC-HCBR-18
22"	559	24"	610	124	56.2	left-swing door	SSC-HCBL-24
22"	559	24"	610	124	56.2	right-swing door	SSC-HCBR-24
22"	559	30"	762	174	78.9	double doors	SSC-HCB-30
22"	559	36"	914	183	83.0	double doors	SSC-HCB-36
22"	559	48"	1219	199	90.3	double doors	SSC-HCB-48



Specification Sheet

Short Form Specifications

All stainless steel type 304 enclosed cabinet. Drawers range from 3" to 10" high, depending on number of drawers per unit. 22"-deep, 35" height. Widths range from 18" to 48" Available with single bank of four 7", three 10", ten 3", or five 6"-high drawers. Inset construction, double-panel drawer face, full-extension ball bearing drawer slides, leveling feet, 4" toe kick, removable back panel. Designed and tested to the SEFA 8 Metal Casework recommended practices.

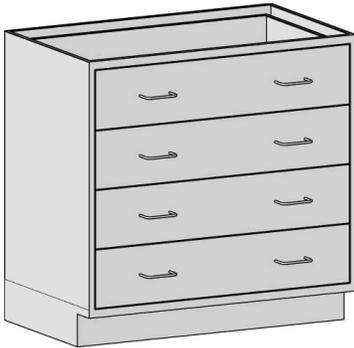

#SSC-HDB7-36



#SSC-HDB10-24

Standing Height Base Cabinets with Single-Bank Drawers

MODELS:

- | | |
|--|---|
| <input type="checkbox"/> <i>SSC-HDB7-18</i> | <input type="checkbox"/> <i>SSC-HDB3-18</i> |
| <input type="checkbox"/> <i>SSC-HDB7-24</i> | <input type="checkbox"/> <i>SSC-HDB3-24</i> |
| <input type="checkbox"/> <i>SSC-HDB7-30</i> | <input type="checkbox"/> <i>SSC-HDB3-30</i> |
| <input type="checkbox"/> <i>SSC-HDB7-36</i> | <input type="checkbox"/> <i>SSC-HDB3-36</i> |
| <input type="checkbox"/> <i>SSC-HDB7-48</i> | <input type="checkbox"/> <i>SSC-HDB3-48</i> |
| <input type="checkbox"/> <i>SSC-HDB10-18</i> | <input type="checkbox"/> <i>SSC-HDB6-18</i> |
| <input type="checkbox"/> <i>SSC-HDB10-24</i> | <input type="checkbox"/> <i>SSC-HDB6-24</i> |
| <input type="checkbox"/> <i>SSC-HDB10-30</i> | <input type="checkbox"/> <i>SSC-HDB6-30</i> |
| <input type="checkbox"/> <i>SSC-HDB10-36</i> | <input type="checkbox"/> <i>SSC-HDB6-36</i> |
| <input type="checkbox"/> <i>SSC-HDB10-48</i> | <input type="checkbox"/> <i>SSC-HDB6-48</i> |

Design and Construction Features


- Type 304 stainless steel construction.
- All units are 22" (559mm) front-to-back and 35" (889mm) height.
- Single-bank full drawers.
- Drawers feature wire pull handles.
- 4" (102mm)-high toe kick.
- Inset construction with double-panel drawer face.
- Full-extension ball bearing slides.
- Leveling feet accessible from inside the cabinet.
- Removable back panel.

Options / Accessories


- Drawer locks
- Soft-close drawer slides
- Custom drawer pulls
- Custom sizes and drawer configurations



Standing Height Base Cabinets Single-Bank Drawers



TOP VIEW OF ALL CABINETS

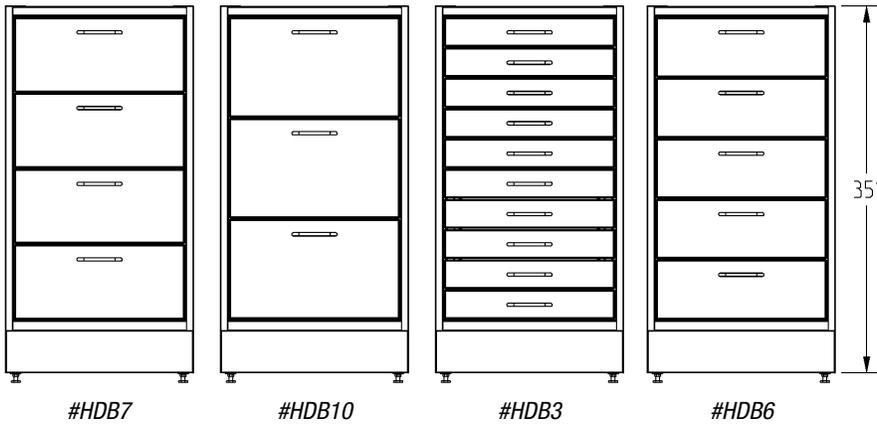


#HDB7

#HDB10

#HDB3

#HDB6

FRONT VIEWS

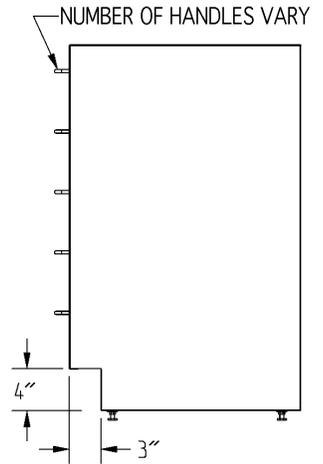

SIDE VIEW

depth		width		with Four 7" (178mm) Drawers			with Three 10" (254mm) Drawers			with Ten 3" (76mm) Drawers			with Five 6" (152mm) Drawers		
in	mm	in	mm	weight	model #	weight	model #	weight	model #	weight	model #	weight	model #		
				lbs.	kg	lbs.	kg	lbs.	kg	lbs.	kg	lbs.	kg		
22"	559	18"	457	142	64.4	SSC-HDB7-18	134	60.8	SSC-HDB10-18	174	78.0	SSC-HDB3-18	149	67.6	SSC-HDB6-18
22"	559	24"	610	167	75.7	SSC-HDB7-24	159	72.1	SSC-HDB10-24	199	90.3	SSC-HDB3-24	174	78.9	SSC-HDB6-24
22"	559	30"	762	260	117.9	SSC-HDB7-30	244	110.7	SSC-HDB10-30	324	146.9	SSC-HDB3-30	274	124.3	SSC-HDB6-30
22"	559	36"	914	269	122.0	SSC-HDB7-36	253	114.8	SSC-HDB10-36	333	151.0	SSC-HDB3-36	283	128.4	SSC-HDB6-36
22"	559	48"	1219	285	129.0	SSC-HDB7-48	269	122.1	SSC-HDB10-48	349	158.0	SSC-HDB3-48	299	135.6	SSC-HDB6-48



Specification Sheet

Short Form Specifications


All stainless steel type 304 enclosed cabinet. 22"-deep. 29 $\frac{1}{2}$ " height. Cabinet widths offered in 18" or 24". Available with two 3"-high drawers, or with one 6"-high drawer. All cabinets feature left-swing or right-swing door. Inset construction with double-panel doors and drawer faces, door mounted with five-knuckle hinges and roller catch, drawers provided with full-extension ball bearing drawer slides, 4" wire pull on all doors and drawers, leveling feet, 4" toe kick, and adjustable shelf. Designed and tested to the SEFA 8 Metal Casework recommended practices.



#SSC-SDDL3-24



#SSC-SDDRT3-24



#SSC-SDDL6-18



#SSC-SDDRT6-18

Sitting Height Base Cabinets with Door/Drawer Combination

MODELS:

- SSC-SDDL3-18
- SSC-SDDL3-24
- SSC-SDDRT3-18
- SSC-SDDRT3-24
- SSC-SDDL6-18
- SSC-SDDL6-24
- SSC-SDDRT6-18
- SSC-SDDRT6-24

Design and Construction Features


- Type 304 stainless steel construction.
- All units are 22" (559mm) front-to-back and 29 $\frac{1}{2}$ " (740mm) height.
- Units with 3" (76mm)-high drawers feature two full drawers, and left- or right-swing door.
- Units with 6" (152mm)-high drawers feature one full drawer, and left- or right-swing door.
- Drawers and doors feature wire pull handles.
- 4" (102mm)-high toe kick.
- Inset construction with double-panel doors and drawer faces.
- Full-extension ball bearing slides.
- Five-knuckle hinges.
- Leveling feet accessible from inside the cabinet.
- Shelves adjustable on $\frac{1}{2}$ " increments.

Options / Accessories


- Glass doors
- Door locks
- Drawer locks
- Additional shelves
- Soft-close drawer slides
- Custom drawer/door pulls
- Custom sizes




Sitting Height Base Cabinets with Door-Drawer Combination

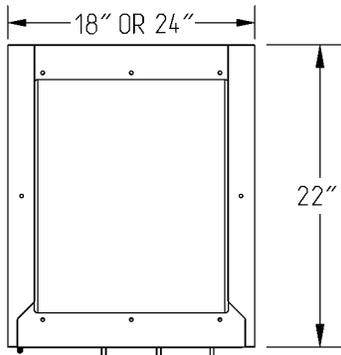

TOP VIEW OF ALL CABINETS

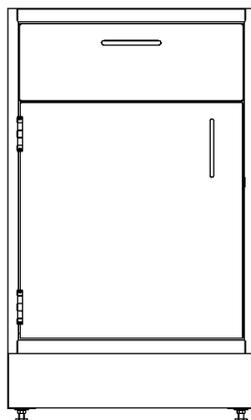


#SDDL3

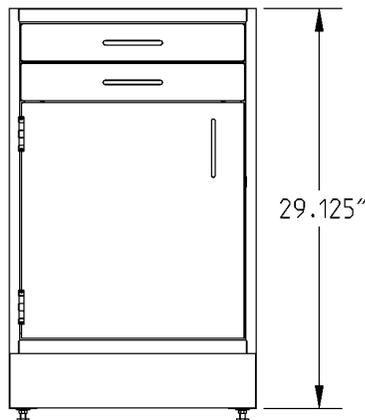

#SDDL6

FRONT VIEWS (OF UNITS WITH LEFT-SWING DOOR)

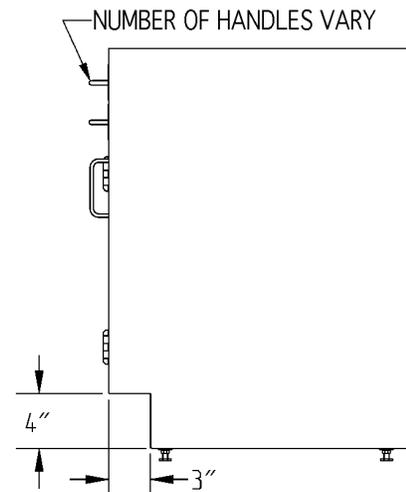

SIDE VIEW OF ALL UNITS

depth		width		door included	weight		model #	weight		model #
in	mm	in	mm		lbs.	kg		lbs.	kg	
22"	559	18"	457	left-swing door	117	53.1	SSC-SDDL3-18	112	50.8	SSC-SDDL6-18
22"	559	18"	457	right-swing door	117	53.1	SSC-SDDRT3-18	112	50.8	SSC-SDDRT6-18
22"	559	24"	610	left-swing door	142	64.4	SSC-SDDL3-24	137	62.1	SSC-SDDL6-24
22"	559	24"	610	right-swing door	142	64.4	SSC-SDDRT3-24	137	62.1	SSC-SDDRT6-24




Specification Sheet


Short Form Specifications

Sitting Height Sink Base Cabinets: All stainless steel 304 enclosed cabinet. 22"-deep. 29 $\frac{1}{8}$ " height. Cabinet widths range from 18" to 58". Inset construction with double-panel doors mounted with five-knuckle hinges and roller catch, 4" wire pulls, leveling feet, 4" toe kick. Designed and tested to the SEFA 8 Metal Casework recommended practices.

Angled Sink Bases: Designed for ADA compliance, all stainless steel 304 construction, sink bases adjoin to other freestanding cabinetry. Widths range from 24" to 48". Removable panel with recessed handle.

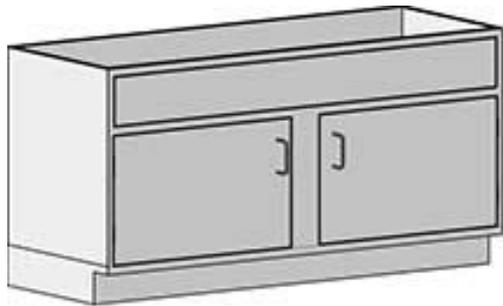

#SSC-SSB-56
freestanding sink base



#SSC-SSBA-36
angled sink base

Sitting Height Base Cabinets— Freestanding Sink Bases and Angled Sink Bases

MODELS:

- | | |
|--------------------------------------|--------------------------------------|
| <input type="checkbox"/> SSC-SSBL-18 | <input type="checkbox"/> SSC-SSB-56 |
| <input type="checkbox"/> SSC-SSBR-18 | <input type="checkbox"/> SSC-SSB-58 |
| <input type="checkbox"/> SSC-SSBL-24 | <input type="checkbox"/> SSC-SSBA-24 |
| <input type="checkbox"/> SSC-SSBR-24 | <input type="checkbox"/> SSC-SSBA-30 |
| <input type="checkbox"/> SSC-SSB-30 | <input type="checkbox"/> SSC-SSBA-36 |
| <input type="checkbox"/> SSC-SSB-36 | <input type="checkbox"/> SSC-SSBA-48 |
| <input type="checkbox"/> SSC-SSB-48 | |

Freestanding Sink Bases

- Type 304 stainless steel construction.
- All units are 22" (559mm) front-to-back and 29 $\frac{1}{8}$ " (740mm) height.
- Open at rear, with partial height back panel, to allow for plumbing access.
- Left- or right-swing door, or double doors.
- Five-knuckle hinges.
- Doors feature wire pull handles.
- 4" (102mm)-high toe kick.
- Custom sizes available.


Angled Sink Bases

- Type 304 stainless steel construction.
- All units are 22" (559mm) front-to-back.
- These units adjoin side-by-side to other Sitting Height Base Cabinets.
- Open at rear, with partial height back panel, to allow for plumbing access.
- Removable front service panel with recessed handle.
- ADA-compliant.




Sitting Height Base Cabinets...

Freestanding Sink Bases

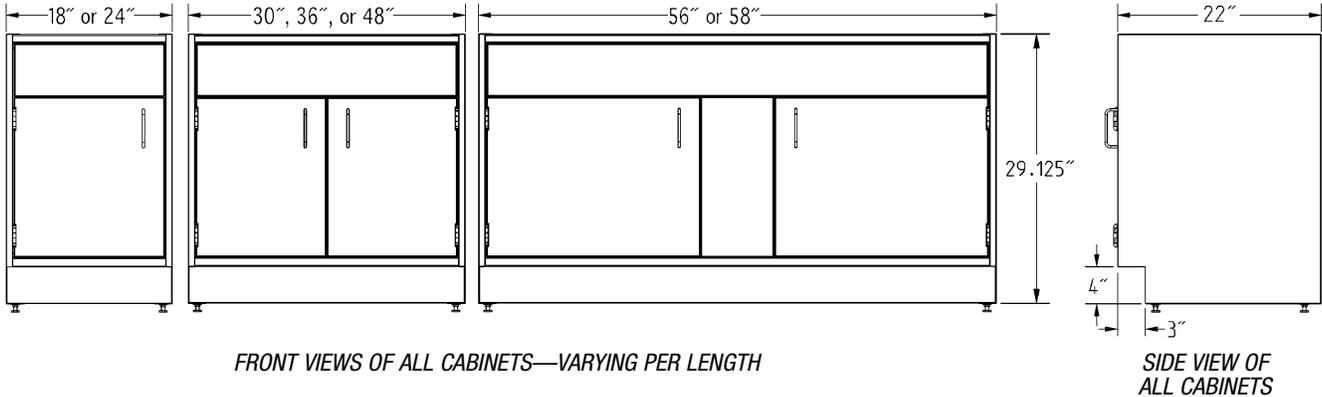

Angled Sink Bases

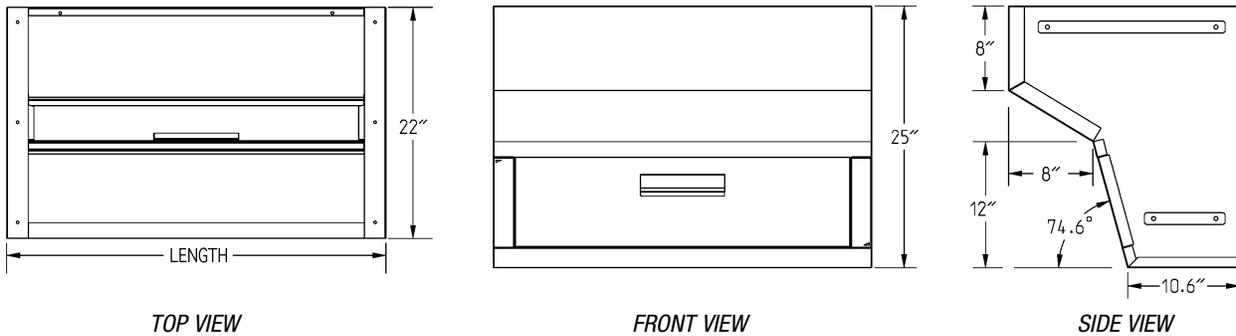

Freestanding Sink Bases

depth		width		description	weight		model #
in	mm	in	mm		lbs.	kg	
22"	559	18"	457	left swing door	97	44.0	SSC-SSBL-18
22"	559	18"	457	right swing door	97	44.0	SSC-SSBR-18
22"	559	24"	610	left swing door	122	55.3	SSC-SSBL-24
22"	559	24"	610	right swing door	122	55.3	SSC-SSBR-24
22"	559	30"	762	double doors	172	78.0	SSC-SSB-30
22"	559	36"	914	double doors	181	82.1	SSC-SSB-36
22"	559	48"	1219	double doors	197	89.4	SSC-SSB-48
22"	559	56"	1524	double doors	217	98.4	SSC-SSB-56
22"	559	58"	1473	double doors	220	99.8	SSC-SSB-58

Angled Sink Bases


depth		width		weight		model #
in	mm	in	mm	lbs.	kg	
22"	559	24"	610	49	22.2	SSC-SSBA-24
22"	559	30"	762	52	23.6	SSC-SSBA-30
22"	559	36"	914	56	25.4	SSC-SSBA-36
22"	559	48"	1219	65	29.5	SSC-SSBA-48




Specification Sheet

Short Form Specifications

All stainless steel type 304 enclosed cabinet. 13"- or 16"-deep. Flat top units are 31"-high, sloped top units are 36"-high. Widths range from 18" to 48". Removable back panel. Two adjustable shelves. Doors are inset double-panel construction, mounted with five-knuckle hinges and provided with 4" wire pull handle and roller catch. Designed and tested to the SEFA 8 Metal Casework recommended practices.

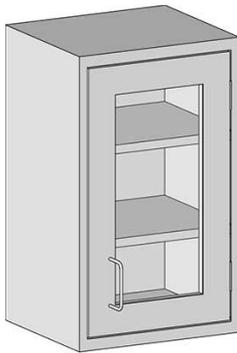

SSC-WCGHR-1324

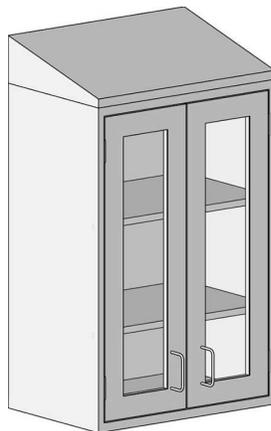

SSC-WCGHST-1630

Upper Cabinets—Framed Glass Swinging Wall Cases

MODELS:

- | | |
|---|---|
| <input type="checkbox"/> SSC-WCGHL-1318 | <input type="checkbox"/> SSC-WCGHLST-1318 |
| <input type="checkbox"/> SSC-WCGHR-1318 | <input type="checkbox"/> SSC-WCGHRST-1318 |
| <input type="checkbox"/> SSC-WCGHL-1324 | <input type="checkbox"/> SSC-WCGHLST-1324 |
| <input type="checkbox"/> SSC-WCGHR-1324 | <input type="checkbox"/> SSC-WCGHRST-1324 |
| <input type="checkbox"/> SSC-WCGH-1330 | <input type="checkbox"/> SSC-WCGHST-1330 |
| <input type="checkbox"/> SSC-WCGH-1336 | <input type="checkbox"/> SSC-WCGHST-1336 |
| <input type="checkbox"/> SSC-WCGH-1348 | <input type="checkbox"/> SSC-WCGHST-1348 |
| <input type="checkbox"/> SSC-WCGHL-1618 | <input type="checkbox"/> SSC-WCGHLST-1618 |
| <input type="checkbox"/> SSC-WCGHR-1618 | <input type="checkbox"/> SSC-WCGHRST-1618 |
| <input type="checkbox"/> SSC-WCGHL-1624 | <input type="checkbox"/> SSC-WCGHLST-1624 |
| <input type="checkbox"/> SSC-WCGHR-1624 | <input type="checkbox"/> SSC-WCGHRST-1624 |
| <input type="checkbox"/> SSC-WCGH-1630 | <input type="checkbox"/> SSC-WCGHST-1630 |
| <input type="checkbox"/> SSC-WCGH-1636 | <input type="checkbox"/> SSC-WCGHST-1636 |
| <input type="checkbox"/> SSC-WCGH-1648 | <input type="checkbox"/> SSC-WCGHST-1648 |

Design and Construction Features



- Type 304 stainless steel construction.
- Two intermediate shelves, adjustable on 1½" (38mm) increments.
- Available with 13" or 16" (330 or 406mm) depth.
- Widths range from 18" to 48" (457 to 1219mm).
- Offered with single left- or right-swing door, or with double doors.
- Doors are double-panel inset construction with five-knuckle hinges, 4" wire pull, and roller catch.
- ¼" (6mm)-thick tempered glass panels.
- Units with flat top are 31" (889mm) high.
- Units with sloped top are 36" (914mm) high.

Options / Accessories

- Door locks
- Additional shelves
- Custom door pulls
- Custom sizes



Upper Cabinets—Framed Glass Swinging Wall Cases

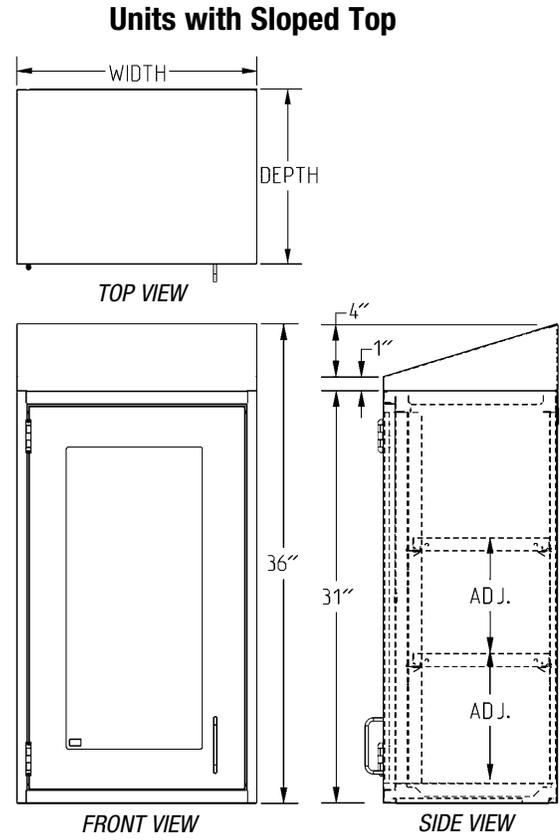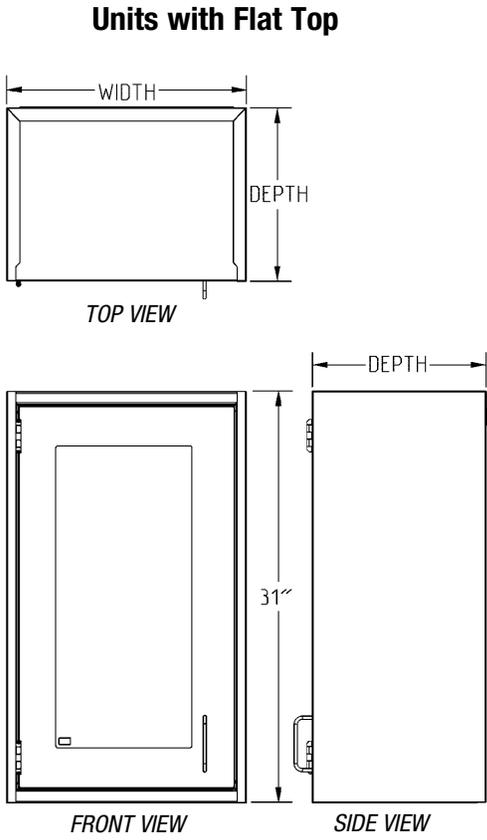

Units with Flat Top						Units with Sloped Top								
depth		width		height		weight		model #	height		weight		model #	
in	mm	in.	mm	in.	mm	lbs.	kg		in.	mm	llbs.	kg		
13"	330	18"	457	left-swing	31"	787	166	75.3	SSC-WCGHL-1318	36"	914	186	84.4	SSC-WCGHLST-1318
13"	330	18"	457	right-swing	31"	787	166	75.3	SSC-WCGHR-1318	36"	914	186	84.4	SSC-WCGHRST-1318
13"	330	24"	610	left-swing	31"	787	172	78.0	SSC-WCGHL-1324	36"	914	192	87.1	SSC-WCGHLST-1324
13"	330	24"	610	right-swing	31"	787	172	78.0	SSC-WCGHR-1324	36"	914	192	87.1	SSC-WCGHRST-1324
13"	330	30"	762	double	31"	787	184	83.4	SSC-WCGH-1330	36"	914	204	92.5	SSC-WCGHST-1330
13"	330	36"	914	double	31"	787	184	83.4	SSC-WCGH-1336	36"	914	222	100.7	SSC-WCGHST-1336
13"	330	48"	1219	double	31"	787	202	91.6	SSC-WCGH-1348	36"	914	258	117.0	SSC-WCGHST-1348
16"	406	18"	457	left-swing	31"	787	172	78.0	SSC-WCGHL-1618	36"	914	192	87.1	SSC-WCGHLST-1618
16"	406	18"	457	rightt-swing	31"	787	172	78.0	SSC-WCGHR-1618	36"	914	192	87.1	SSC-WCGHRST-1618
16"	406	24"	457	left-swing	31"	787	178	80.7	SSC-WCGHL-1624	36"	914	198	89.8	SSC-WCGHLST-1618
16"	406	24"	457	rightt-swing	31"	787	178	80.7	SSC-WCGHR-1624	36"	914	198	89.8	SSC-WCGHRST-1618
16"	406	30"	762	double	31"	787	190	86.2	SSC-WCGH-1630	36"	914	210	95.2	SSC-WCGHST-1630
16"	406	36"	914	double	31"	787	196	88.9	SSC-WCGH-1636	36"	914	216	98.0	SSC-WCGHST-1636
16"	406	48"	1219	double	31"	787	214	97.1	SSC-WCGH-1648	36"	914	264	119.7	SSC-WCGHST-1648

