

Digital Locker Specification Sheet

SMS-05-V39-UCL

Locks arrive in Day-Use mode for shared use and can be programmed for permanent use by management.

FEATURES:

BODY CONSTRUCTION: Knock-down, 24 gauge

BODY STYLES: Single, double, triple and six tier

DOOR: 16 gauge, louvered type, 18 gauge for box doors

LATCHING: Single-point

HINGES: Continuous piano type

HANDLE: User programmable electronic lock/handle, single-point latching

HOOKS: One double prong ceiling hook and two single hooks per single and double tier opening. One double ceiling hook for triple tier. No hooks for 6 tier

COAT RODS: Available for single tier at a nominal cost

SHELVES: Hat shelf is included in single tier lockers.

LEGS: 6" high legs are standard. Lockers without legs are available for a nominal charge.





LOCK FEATURES:


- Powered by 2 AA batteries which provide in excess of 10,000 uses.
- 2 AA batteries are included.
- LED's flash to indicate low battery level.
- Locker can be opened when batteries are low or dead by using the Master Key override.
- 8-digit master and sub-master codes for two levels of management security.

DAY-USE MODE:

- User can lock and unlock any available locker door with a user selected 4-digit code.
- Upon returning, user enters the 4-digit code to unlock the door. Code is erased and the locker is available for the next user.

PERMANENT MODE:

- User enters a pre-programmed 4-digit code to unlock and use locker repeatedly.
- Lock does not require a code to re-lock door.

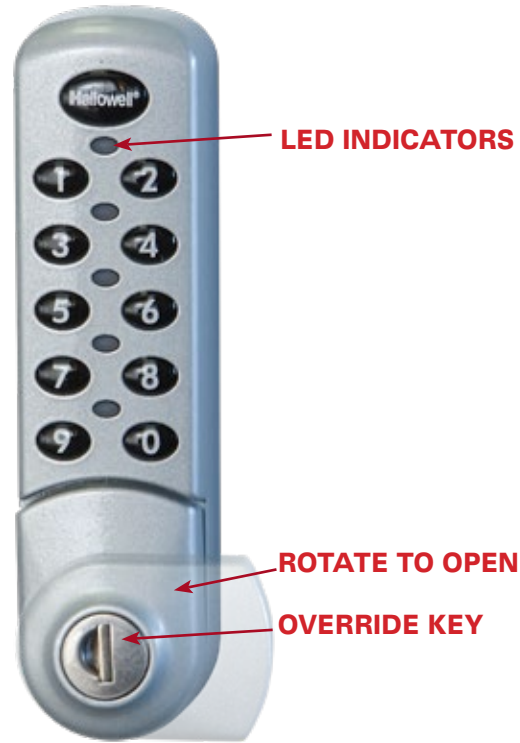

Width	Depth	Opening Height	Frame Height	Tier	Grouping	Openings Per Group	Knock-Down Cat No.	Fully-Assembled Cat No.	Color Selection
SINGLE TIER									
12	12	72	78	1	1-wide	1	UEL1228-1	UEL1228-1A	PT
12	12	72	78	1	3-wide	3	UEL3228-1	UEL3228-1A	PT
12	15	72	78	1	1-wide	1	UEL1258-1	UEL1258-1A	PT
12	15	72	78	1	3-wide	3	UEL3258-1	UEL3258-1A	PT
12	18	72	78	1	1-wide	1	UEL1288-1	UEL1288-1A	PT
12	18	72	78	1	3-wide	3	UEL3288-1	UEL3288-1A	PT
DOUBLE TIER									
12	12	36	78	2	1-wide	2	UEL1228-2	UEL1228-2A	PT
12	12	36	78	2	3-wide	6	UEL3228-2	UEL3228-2A	PT
12	15	36	78	2	1-wide	2	UEL1258-2	UEL1258-2A	PT
12	15	36	78	2	3-wide	6	UEL3258-2	UEL3258-2A	PT
12	18	36	78	2	1-wide	2	UEL1288-2	UEL1288-2A	PT
12	18	36	78	2	3-wide	6	UEL3288-2	UEL3288-2A	PT
TRIPLE TIER									
12	12	24	78	3	1-wide	3	UEL1228-3	UEL1228-3A	PT
12	12	24	78	3	3-wide	9	UEL3228-3	UEL3228-3A	PT
12	15	24	78	3	1-wide	3	UEL1258-3	UEL1258-3A	PT
12	15	24	78	3	3-wide	9	UEL3258-3	UEL3258-3A	PT
12	18	24	78	3	1-wide	3	UEL1288-3	UEL1288-3A	PT
12	18	24	78	3	3-wide	9	UEL3288-3	UEL3288-3A	PT
SIX TIER									
12	12	12	78	6	1-wide	6	UEL1228-6	UEL1228-6A	PT
12	12	12	78	6	3-wide	18	UEL3228-6	UEL3228-6A	PT
12	15	12	78	6	1-wide	6	UEL1258-6	UEL1258-6A	PT
12	15	12	78	6	3-wide	18	UEL3258-6	UEL3258-6A	PT
12	18	12	78	6	1-wide	6	UEL1288-6	UEL1288-6A	PT
12	18	12	78	6	3-wide	18	UEL3288-6	UEL3288-6A	PT



729 TAN (PT)

