

Lab Drying Rack Specification Sheet

SMS-08-V69-SSC-PB


Specification Sheet

Short Form Specifications


Heavy gauge type 304 stainless steel construction. Comes with 15 to 88 pegs, depending on model. Pegs are 6"-long white polymer. 2" or 4" integral drip trough, with 36"-long clear flexible drain tube. Wall-mounting bracket included.

Design and Construction Features

- Heavy gauge type 304 stainless steel construction
- Comes standard with 6" (152mm) white polymer pegs
- 2" or 4" (51 or 102mm) integral drip trough
- All drip troughs come with 36" (914mm)-long clear flexible drain tubing
- Wall mounting bracket included



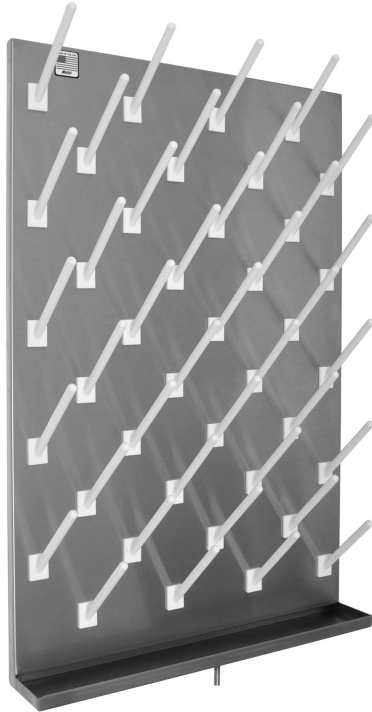


#SMS-83-SSC-PB2436-4

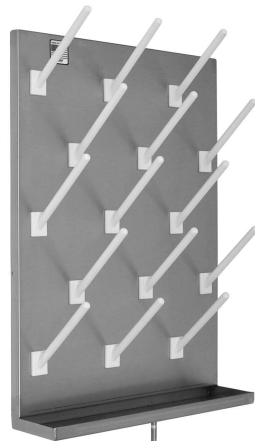

#SMS-83-SSC-PB1824-4

width		height		weight		number of pegs	with 2"-Deep Drip Trough
in	mm	in	mm	lbs.	kg		model #
18"	457	24"	610	13	5.9	15	SMS-83-SSC-PB1824-2
24"	610	18"	457	15	6.8	16	SMS-83-SSC-PB2418-2
24"	610	24"	610	17	7.7	20	SMS-83-SSC-PB2424-2
24"	610	30"	762	23	10.4	32	SMS-83-SSC-PB2430-2
24"	610	36"	914	25	11.3	40	SMS-83-SSC-PB2436-2
30"	762	24"	610	23	10.4	25	SMS-83-SSC-PB3024-2
30"	762	30"	762	25	11.3	50	SMS-83-SSC-PB3030-2
30"	762	36"	914	25	11.3	40	SMS-83-SSC-PB3036-2
36"	914	24"	610	25	11.3	30	SMS-83-SSC-PB3624-2
36"	914	30"	762	26	11.8	60	SMS-83-SSC-PB3630-2
36"	914	36"	914	27	12.2	66	SMS-83-SSC-PB3636-2
48"	1219	24"	610	26	11.8	40	SMS-83-SSC-PB4824-2
48"	1219	30"	762	28	12.7	48	SMS-83-SSC-PB4830-2
48"	1219	36"	914	30	13.6	88	SMS-83-SSC-PB4836-2

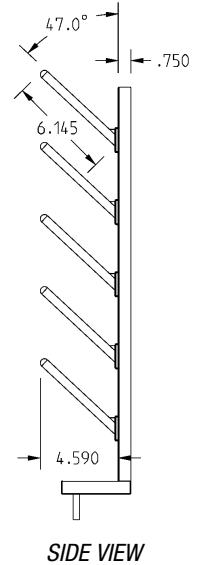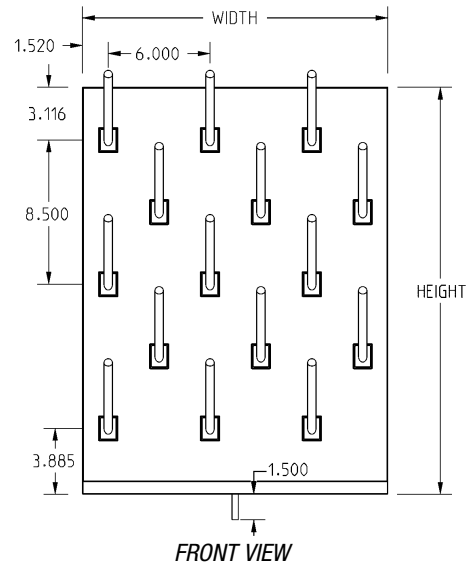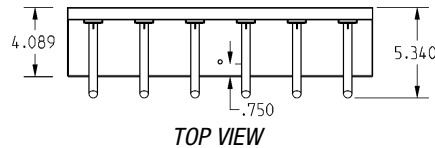

(unit with 4"-deep drip trough shown)

Certifications / Approvals



SEFA 8 Metal Casework

