Adjustable Height Stainless Steel Table SMS-10-V69-MT

Specification Sheet

Short Form Specifications

Tables available with 14/304 or 16/304 stainless steel tops. All with 90° downturn sides and 11½″ rolled front edge. Rear edges can be ordered with 11/2" roll or a 4"-high back splash. Tabletops come in standard sizes of 24" x 48"/60"/72" or 30" x 48"/60"/72". All tops are reinforced with stainless steel hat and leg channels, with patented uni-lok® gusset system. Legs are 15/4" O.D. stainless steel, with 11/2" O.D. stainless steel expanding sections. Standard 1" stainless steel adjustable bullet feet are included. Heavy gauge stainless steel adjustable undershelf with marine edge. Crank pump case can be located on the left, right or center of the table.



Options / Accessories

Consult factory for add-on accessories

ADA/Ergonomic Height Adjustable Tables

MODELS:

☐ T24*SEB-HA ☐ T30*SEB-HA ☐ *T24*SE-HA* ☐ *T30*SE-HA* ☐ T24*SEB-BS-HA ☐ T30*SEB-BS-HA ☐ T30*SE-BS-HA ☐ T24*SE-BS-HA

Design & Construction Features

- Infinite working heights between 32" and 40" (813 and 1016mm)—8" (203mm) of adjustability.
- 525-575 lb. weight capacity, depending on size of table

Tabletop

- Patented uni-lok[®] gusset system (patent # 5,165,349).
 All tabletops reinforced with stainless steel hat and leg channels, with 90° downturn sides and 11/2" (38mm) rolled front edge.
- Offered in 16 gauge type 304 or 14 gauge type 304 stainless steel construction.
- Rear edges can be ordered with 11/2" (38mm) roll or a 4" (102mm)-high back splash.
- Crank pump case, with folding handle, can be located on the left, right, or center of the table.
- Works with 20" (508mm) standard drawers

Undershelf


• Heavy gauge stainless steel adjustable undershelf with marine edge.


Legs

- 1%" (41mm) O.D. stainless steel legs, with 1½" (38mm) O.D. stainless steel expanding sections.
- 1" (25mm) stainless steel adjustable bullet feet.



ADA/Ergonomic Height Adjustable Tables

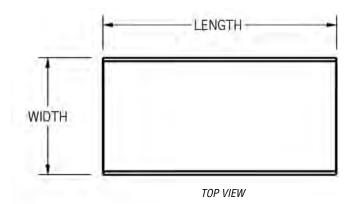

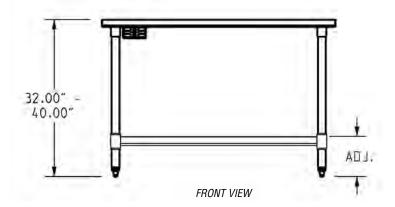



(FLAT TOP TABLE SHOWN WITH CRANK HANDLE AT LEFT END)

To indicate location of crank case, add suffix "-L" (left end), "-R" (right end), or "-C" (center) at end of model number. Example: T2448-SE-HA-L

			<u>with Flat Top</u>		<u>with 4" (76mm) Backsplash</u>	
width in. mm	length in. mm	weight cap.	<u>16/304 top</u> model #	14/304 top model #	<u>16/304 top</u> model #	14/304 top model #
24" 610	48″ 1219	575 260.8	T2448SEB-HA	T2448SE-HA	T2448SEB-BS-HA	T2448SE-BS-HA
24" 610	60" 1524	550 249.5	T2460SEB-HA	T2460SE-HA	T2460SEB-BS-HA	T2460SE-BS-HA
24" 610	72" 1829	525 238.1	T2472SEB-HA	T2472SE-HA	T2472SEB-BS-HA	T2472SE-BS-HA
30″ 762	48" 1219	575 260.8	T3048SEB-HA	T3048SE-HA	T3048SEB-BS-HA	T3048SE-BS-HA
30" 762	60" 1524	550 249.5	T3060SEB-HA	T3060SE-HA	T3060SEB-BS-HA	T3060SE-BS-HA
30" 762	72″ 1829	525 238.1	T3072SEB-HA	T3072SE-HA	T3072SEB-BS-HA	T3072SE-BS-HA

